


**Products** Attachments for Wheel loader, Telescopic loader

**Pic. 606 Bucket with grapple**

for wheel and telescopic loaders



Opened

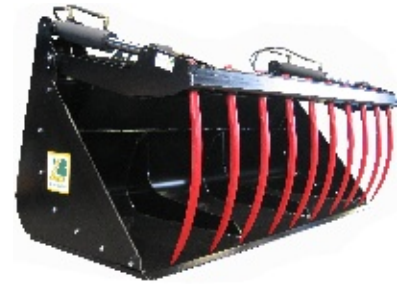

The bucket with grapple is heavy duty designed for loading manure. By removing the screwed sideparts it is easier to load heavy manure.

**Standard equipment:**

- For wheel- and telescopic loader
- With highwear resistant cutting edge (150x20mm, 500HB)
- With strong substructure
- Bucket height 800mm, bucket depth 1000mm
- With 1 respec. 2 sickle reinforcements
- With removable sideparts (screwed)
- With 2 hydraulic cylinders (Max. hydraulic pressure 220 bar)
- Opening width ca. 1450mm
- Thick material main tube with welded cones
- Twist protected tines with 800mm length in the grapple

Special designed attachments are deliverable on request.

Width	Volume	Weight	Tines
1600 mm	ca. 1130 l	ca. 690 kg	7
1800 mm	ca. 1280 l	ca. 730 kg	8
2000 mm	ca. 1420 l	ca. 770 kg	9
2200 mm	ca. 1560 l	ca. 810 kg	10
2400 mm	ca. 1700 l	ca. 850 kg	10

**Additional:**

Model with 1 bowed tine 600mm at every side

Model with high wear res. substruc. and cutting edge (200x20mm, 500HB) per m.

Model with high wear res. substruc. & screwed knife (dbl. beveled, 500HB) per m.

Model with pressure holding valve (needed for as example Bobcat, Dieci, Faresin, Merlo, MF)

Model with pressure limiting valve (adjusted to 220 bar)