


Products

Pic. 704 Tines

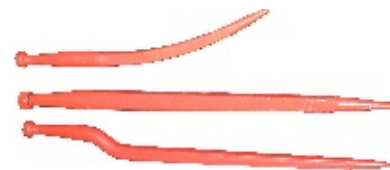

Beginning from top: Bowed, straight, kinked

Standard equipment:

Description of the short tags

NL = Normal load squared full profile tines with maximum diameter of 36mm

SL = Heavy duty squared full profile tines with maximum diameter of 45mm

SXL = Heavy duty round full profile tines with diameter of 50mm

SXXL = Extra heavy duty round full profile tines with diameter of 56mm

Type	Length	Threat	Key	Weight
Bowed NL	600 mm	M22 x 1,5	32	3,3 kg
Bowed NL	800 mm	M22 x 1,5	32	4,2 kg
Bowed SL	600 mm	M30 x 2	41	4,3 kg
Bowed SL	800 mm	M30 x 2	41	5,5 kg
Bowed SL	1000 mm	M30 x 2	41	6,7 kg
Kranked NL	830 mm	M24 x 2	36	4,2 kg
Straight NL	600 mm	M22 x 1,5	32	2,9 kg
Straight NL	800 mm	M22 x 1,5	32	4,3 kg
Straight NL	1000 mm	M22 x 1,5	32	5,1 kg
Straight NL	1100 mm	M22 x 1,5	32	5,2 kg
Straight NL	1400 mm	M22 x 1,5	32	6,0 kg
Straight SL	800 mm	M30 x 2	40	6,3 kg
Straight SL	1000 mm	M30 x 2	40	7,5 kg
Straight SL	1250 mm	M30 x 2	40	8,7 kg
Straight SL	1400 mm	M30 x 2	40	9,0 kg
Straight SXL	800 mm	M28 x 1,5	41	9,8 kg
Straight SXL	1000 mm	M28 x 1,5	41	12,0 kg
Straight SXXL	1400 mm	M33 x 2	50	22,5 kg

Source: www.bressel-lade.de/en/Abb704.htm - Date: 07.12.2011