

PRODUCT
S85



YOUR ATTACHMENT SPECIALIST - www.bressel-lade.de
Send us a mail to: info@bressel-lade.de



Basic equipment




Function



The Silage rake is used for pulling down the silage out of high silage stocks. It is also used for rake down the silage from the silage stock and load it with a light material bucket.

Tine tube

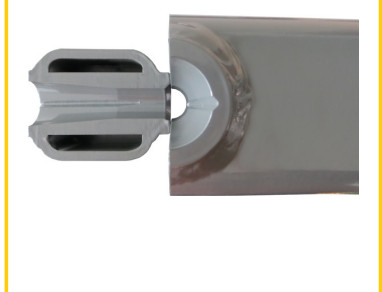

- INFORMATION**
- Thick material main tube with welded cones (twist protected)
 - With 7 high value full profile hardened tines
 - Tine length 800mm heavy duty



SILAGE RAKE

for loader from 1,5 to 10tons lifting capacity

A PERFECT ATTACHMENT IN 3 STEPS ① + ② + ③ = 😊

① CHOOSE PRODUCT

Width	Extension	Weight	Part-No.
2350 mm	1500 mm	305 kg	S85 OZ-80
2350 mm	2500 mm	345 kg	S85 OZ-81
2350 mm	4000 mm	695 kg	S85 OZ-83
2350 mm	5000 mm	795 kg	S85 OZ-84

② LOADER QUICK COUPLER (INDICATE BRAND & TYPE)

Euro-System	AF-M4
Frontloader without Euro-coupling system	NE-02
Wheel- or telescopic loader	NE-51
Excavator Lehnhoff MS08	NE-70

Please indicate **ALWAYS** manufacturer and type of the loader on inquiries or orders!

③ SPECIAL EQUIPMENT

■ Color RAL 7043 - grey	FA-02
■ Color RAL 9005 - black	FA-03

😊 READY

Delivery FCA at factory Visselhövede (Transportcosts on request)