


Products Attachments for Wheel loader, Telescopic loader

Pic. 612 Box turner

for wheel and telescopic loaders

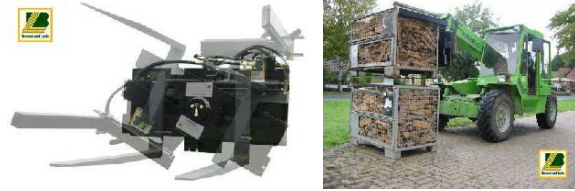

Turning range 220°



Special equipment: Pallet fork tines

The turning angle of 220° allows the restless unloading of boxes.

Standard equipment:

- For wheel- and telescopic loader
- Width of pallet fork carrier 1200mm
- With foldable, adjustable sidetine
- Rotation to left side 220° (rotation to right side deliverable without surcharge)
- With 2 doubleacting hydraulic cylinders (Max. hydraulic pressure 220 bar)
- Norm of pallet fork carrier for 2500kg capacity ISO FEM II B
- Norm of pallet fork carrier for 3500kg capacity ISO FEM III B

Special designed attachments are deliverable on request !

Max. lifting capacity	Weight
2500 kg	ca. 480 kg
3500 kg	ca. 520 kg

Additional:

Model with 2 pallet fork tines 1100mm (2500kg capacity/pair)

Model with 2 pallet fork tines 1100mm (3500kg capacity/pair)

Model with hydraulic sideshift (200mm, + 1x DA needed)

Model with switch valve 12V/45l in connection with sideshift

Model with mechanic adjustable downholder

Model with pressure holding valve (needed for as example Bobcat, Dieci, Faresin, Merlo, MF)

Model with pressure limiting valve (adjusted to 220 bar)